

# RESISTANCE DECADE BOX

Model : RBOX-408

ISO-9001, CE, IEC1010

## FEATURES

\* Applications :

General applications

Troubleshooting, maintenance

Education and Vocational training


Production line testing

Radio and TV services

Working standards

Research design & develop

Physics laboratory work

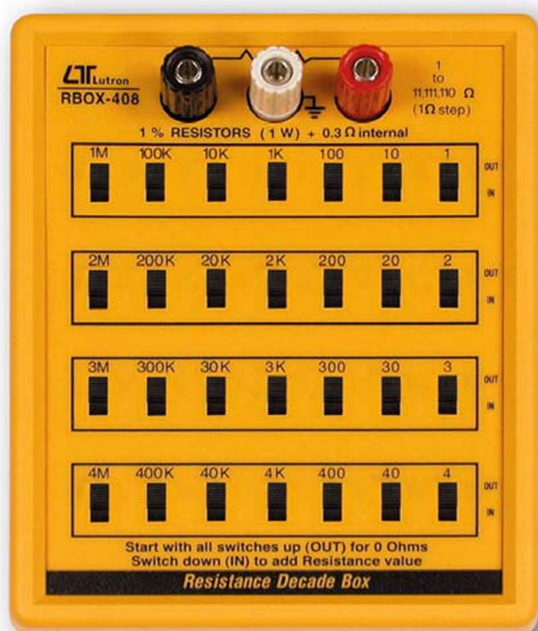

\* Pocket size, offering accurate, reliable performance.

\* 1 to 11,111,110 ohm, wide range and high resolution ( 1 ohm per step ), practical and versatile tools.

\* With seven decades of resistance.

\* Slide switches that allow the user to simply add or subtract for desired value.

\* Terminals with multi way binding posts, one to switch shield case.



**Lutron**

**LUTRON ELECTRONIC**

***The Art of Measurement***

# RESISTANCE DECADE BOX

Model : RBOX-408

## FEATURES

<p>* Applications :</p> <ul style="list-style-type: none"> <li>General applications</li> <li>Troubleshooting, maintenance</li> <li>Education and Vocational training</li> <li>Production line testing</li> <li>Radio and TV services</li> <li>Working standards</li> <li>Research design &amp; develop</li> <li>Physics laboratory work</li> </ul>
* Pocket size, offering accurate, reliable performance.
* 1 to 11,111,110 ohm, wide range and high resolution ( 1 ohm per step ), practical and versatile tools.
* With seven decades of resistance.
* Slide switches that allow the user to simply add or subtract for desired value.
* Terminals with multi way binding posts, one to switch shield case.
* ABS plastic housing case, rugged components.

## SPECIFICATIONS

Range	1 to 11,111, 110 ohm ( 1 ohm per step )
Accuracy	1% resistors used throughout.
Wattage	1 W. * Do not add the voltage over AC 40V or DC 60 V to the output resistance terminals even its stand Wattage is less than 1 W.
Internal Stray Resistance	0.3 ohm max.
Power Supply	None
Operating Temperature	0 to 50 °C (32 to 122 °F).
Operating Humidity	Less than 80% RH.
Weight	320 g/0.70 lb.
Dimension	14.7 cm x 11.7 cm x 5.1 cm. ( 5.79 x 4.61 x 2.01 inch ).
Accessory Included	Operation Manual..... 1 PC.
Optional Accessory	Test alligator clips, one pair, TL-03

## OPERATION PROCEDURE

1) Start with all switches up ( OUT ) for 0 ohms.
2) Switch down ( IN ) to add Resistance value.