

TEST BOX


Functional checking for RCD testers,
Loop testers and Insulation/Continuity testers



FEATURES

- Wide range of operating voltage from AC 210V/50Hz to 250V/50Hz
- For checking AC voltage.
- For checking a RCD tester's test current & time in mA(ms).
- For checking a loop tester.
- For wiring check (Phase, Neutral, Earth).
- For checking continuity.
- For checking insulation (The maximum is 1000V).
- For checking UK16th edition.

Layout of the front panel

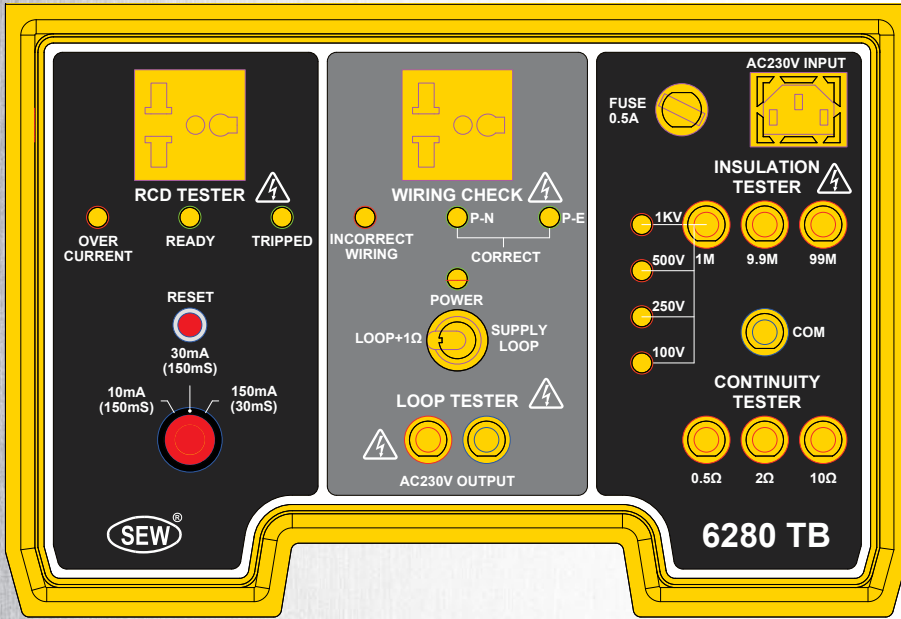


- 6280 TB is an ideal tool which provides verifications of Insulation testers, Continuity testers, RCD testers and Loop testers.

SPECIFICATIONS


RCD Testing

Range	10mA @ 150ms
	30mA @ 150ms
	150mA @ 30ms

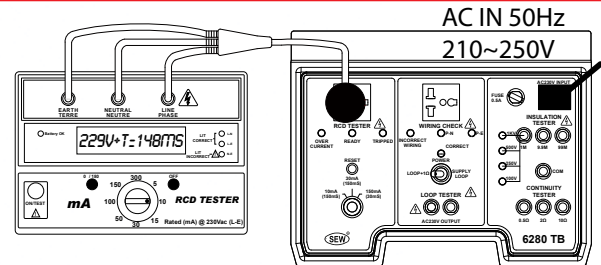


Insulation Testing

Range	1MΩ / 9.9MΩ / 99MΩ
Accuracy	± 1%
Max. Testing	1.2kV

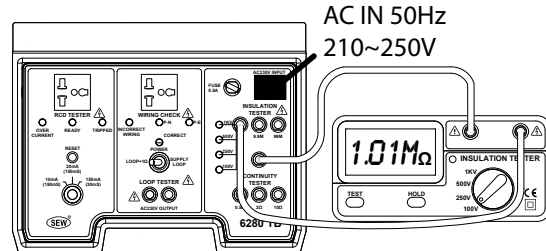

Continuity Testing

Range	0.5Ω / 2Ω / 10Ω
Accuracy	± 0.05Ω / ± 0.1Ω / ± 0.2Ω
Max. Current	300mA

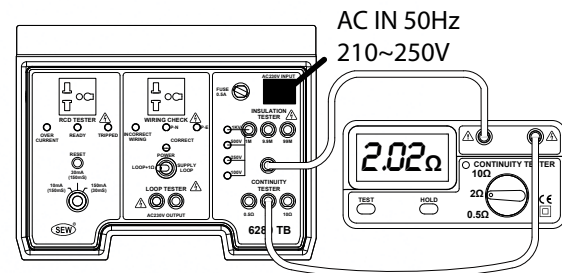

LOOP Testing

Range	Supply Loop / Supply Loop +1Ω
Accuracy	0.45Ω ± 0.05Ω / 1.45Ω ± 0.05Ω

- Dimension: 330(L)x260(W)x160(D)mm
- Weight: Approx. 2570g

