




TEST LEADS



- **Wire :** PVC UL 1803/18AWG
length : 1100 ± 30 mm
Out diameter : 3.50mm
Temperature tolerance range : $-40^{\circ}\sim 105^{\circ}$
Braid copper wires : 64/0.12mm
- **Terminal :**
Right angle 4mm brass (nickel plated) banana plug with caged and insulated sheathing to avoid the brass oxidation.
- **Rating :**
EN 61010-031:2002+A1:2008
CAT III 1000V 10A/CAT IV 600V 10A

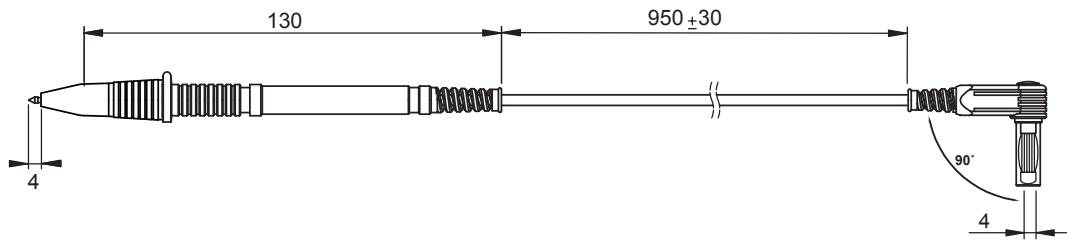